




# SLING25

## SLING 3683

- 25 mm wide
- 28 kN
- Polyamid

A strong anchor sling with a 25 mm wide polyamid webbing.

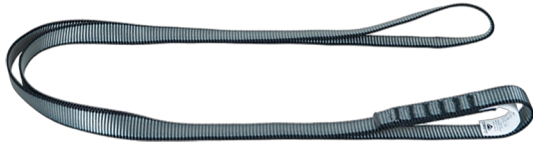

### SEGMENTS

- ✓ Pitch roof work
- ✓ General industry
- ✓ Tower climber
- ✓ Offshore
- ✓ Confined space
- ✓ Scaffolding
- ✓ Rope access
- ✓ Telecom
- ✓ Wind energy

## ARTICLES

012255000	Cresto, Sling 25mm, 0.6m, grey
012255001	Cresto, Sling 25mm, 0.8m, grey
012255002	Cresto, Sling 25mm, 1m, grey
012255003	Cresto, Sling 25mm, 1.2m, grey
012255004	Cresto, Sling 25mm, 2m, grey
012255011	Cresto, Sling 25mm, 0.8m, grey, 50pcs
012255013	Cresto, Sling 25mm, 1.2m, grey x50pcs
012255005	Cresto, Sling 25mm, 1.5m, grey

## OVERVIEW

Sling25 is an anchor sling in 25 mm, strong polyamid webbing. The sling is sewn as a circle and can be used as an anchor point in different environments.

### CRESTO GROUP

Diabasgatan 16  
254 68 Helsingborg  
Sweden

T. +46 (0)42 563 00  
E. support@crestogroup.com  
www.crestogroup.com

**CRESTO GROUP**  
EXPECT MORE

## SPECIFICATION

### PRODUCT PROPERTIES

Maximum number of users	1
Maximum load (kg)	140.0
Minimum working temperature (c)	-40.0
Maximum working temperature (c)	100.0
Minimum breaking strength - MBS (kN)	28.0
Material	Polyamide
Rope	25 mm polyamid webbing

### CLASSIFICATION

EN-standard	EN 354 : 2010, EN 566 : 2017, EN 795 : 2012
Notified body	1019, VVUU, a.S., Pikartska 1337/7 716 07 Ostrava - Radvanice Czech Republic
Other standards	ANSI Z359.1

### ANNUAL INSPECTION

Annual inspection	Yes, every 12 months
Life span	10 + 2 years. Product lifecycle 10 years + 2 years stock keeping
Warranty	2+1 year when registered in Inspector
Identification	Serial number
RFID	Yes

### DOCUMENTS

Declaration of Conformity	Yes
Manual languages	English (EN), Swedish (SV), Norwegian (NO), Danish (DA), Finnish (FI), German (DE), French (FR), Spanish (ES)

#### CRESTO GROUP

Diabasgatan 16  
254 68 Helsingborg  
Sweden

T. +46 (0)42 563 00  
E. support@crestogroup.com  
www.crestogroup.com

**CRESTO GROUP**  
EXPECT MORE

## IMAGES

